

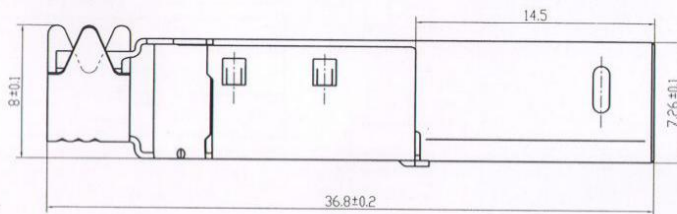


USBP-1B-SX-C

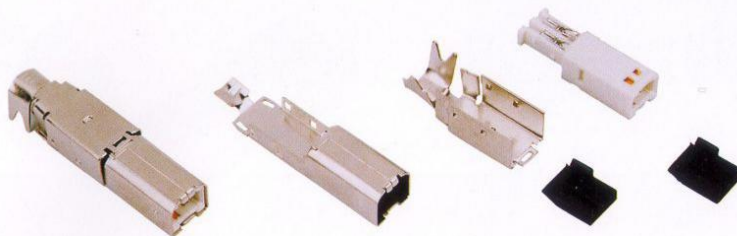

Specification

Housing: Thermoplastic, UL94V-0

Temperature Range: -20°C to +85°C

Contact: Copper Alloy


Shell: Steel

Voltage Current Rating: 1AMP.30V AC

Insulation Resistance: 1000MΩ Min

Contact Resistance: 30mΩ Max

Dielectric Withstanding Voltage: 500V AC

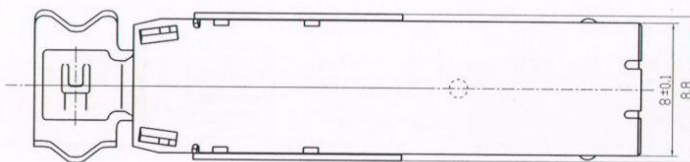

Tolerances unless otherwise specified:
0~1±0.05, 1~10±0.1, 10~20±0.15, 20~30±0.2.