

## Order Information

MIN-A1S  F-  B4S

Contact plating

0: Gold Flash

1: Au 3 $\mu$  "

2: Au 6 $\mu$  "

3: Au 15 $\mu$  "

4: Au 30 $\mu$  "

1: Middle Key

2: Single Key

3: Double Key

## Specification

Housing: Thermoplastic, UL94V-0

Contact: Copper Alloy

Shell: Steel







Voltage Current Rating: 1AMP.30V AC

Insulation Resistnce: 100M $\Omega$  Min

Contact Resistance: 50m $\Omega$  Max

Dielectric Withstanding Voltage: 100V AC

Temperature Range: -50 $^{\circ}$ C to+85 $^{\circ}$ C

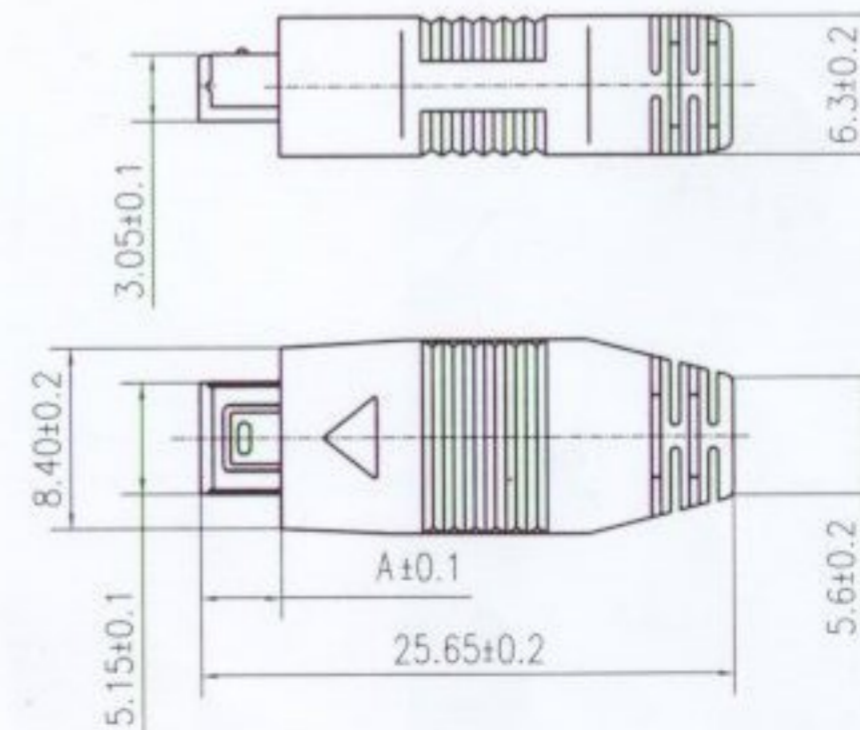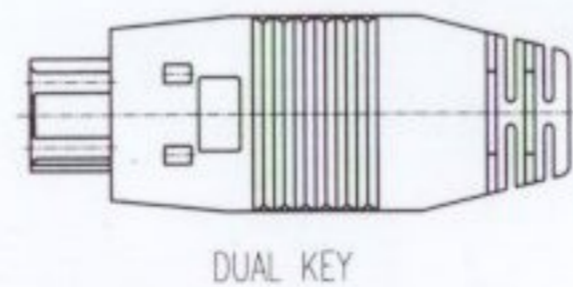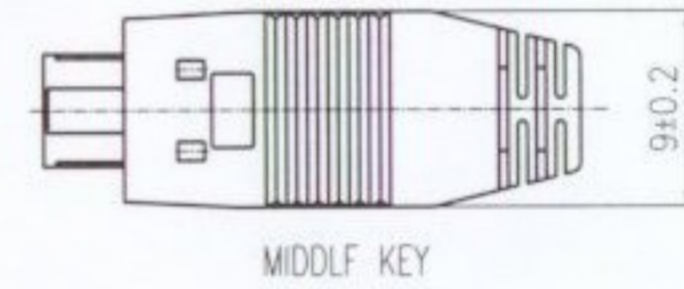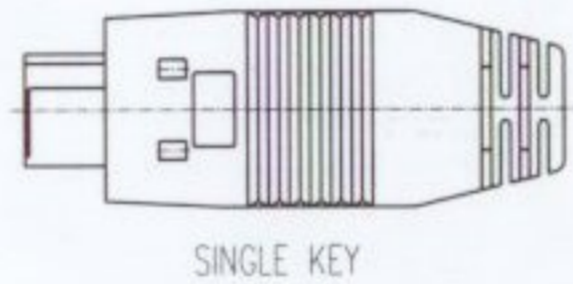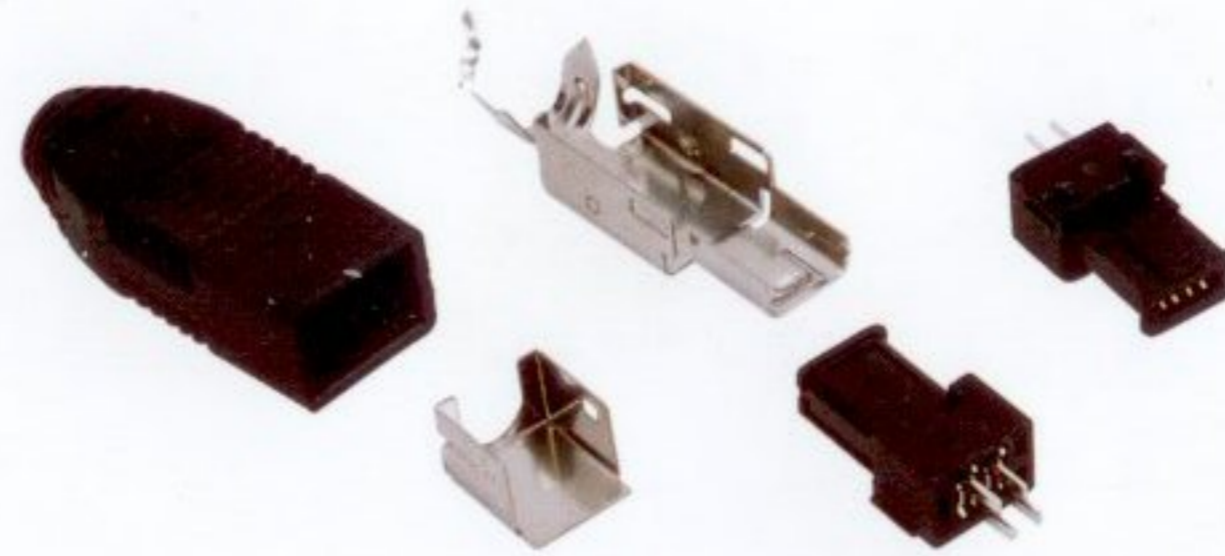

Tolerances unless otherwise specified:  
0-1 $\pm$ 0.05, 1-10 $\pm$ 0.1, 10-20 $\pm$ 0.15, 20-30 $\pm$ 0.2

A	6.0	4.7	4.0
---	-----	-----	-----