

Order Information

MIN-B1S1M- □ B5N

Contact plating

0: Gold Flash

1: Au 3 μ "

2: Au 6 μ "

3: Au 15 μ "

4: Au 30 μ "

Specification

Housing: Thermoplastic, UL94V-0

Contact: Copper Alloy

Shell: Steel





Voltage Current Rating: 1AMP.30V AC

Insulation Resistnce: 100M Ω Min

Contact Resistance: 50m Ω Max

Dielectric Withstanding Voltage: 100V AC

Temperature Range: -50 $^{\circ}$ C to+85 $^{\circ}$ C

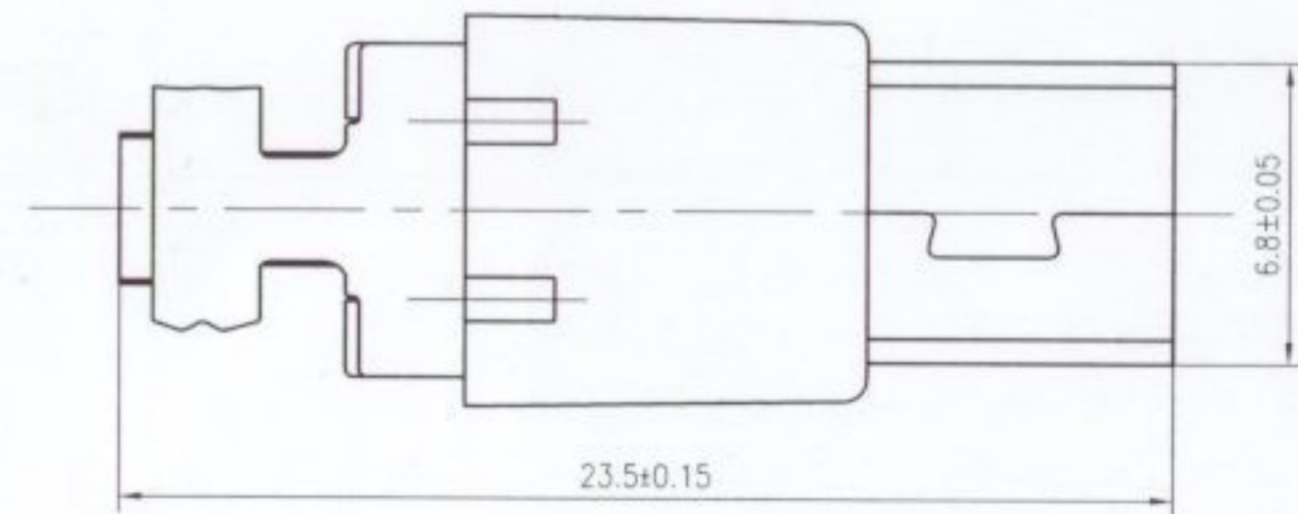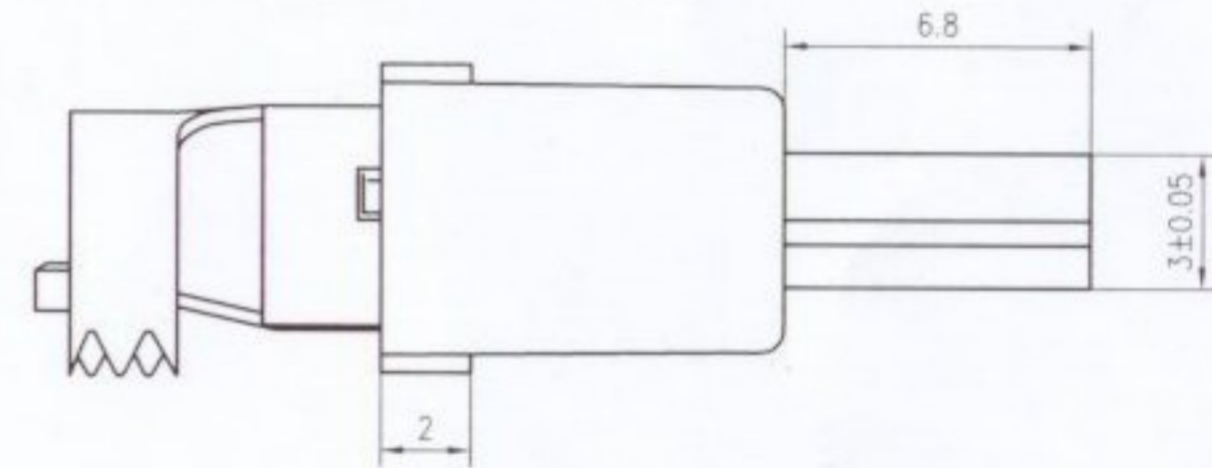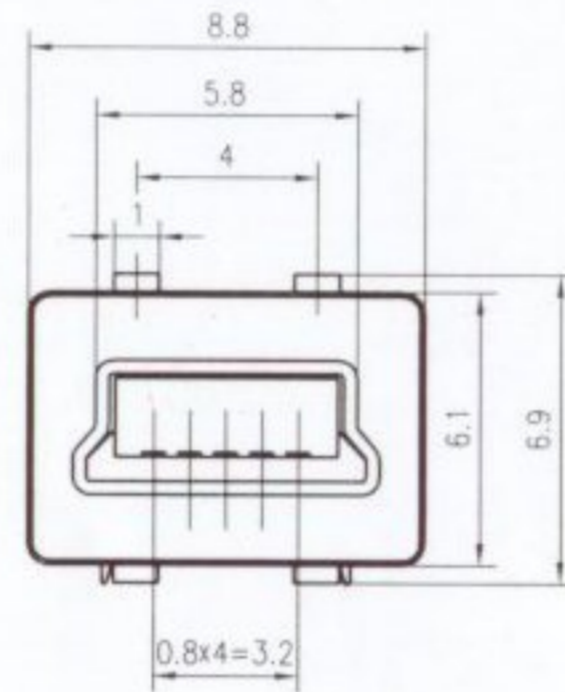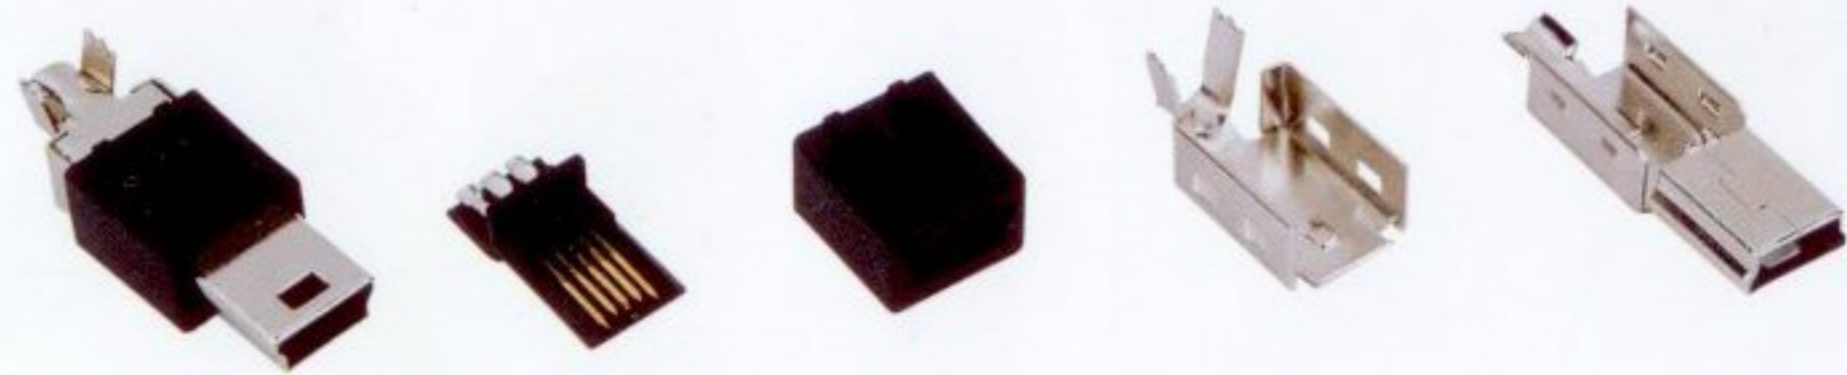

Tolerances unless otherwise specified:
0~1 \pm 0.05, 1~10 \pm 0.1, 10~20 \pm 0.15, 20~30 \pm 0.2.