



RS1A THRU RS1M

1.0 AMP. Fast Recovery Surface Mount Rectifiers



Voltage Range
50 to 1000 Volts
Current
1.0 Ampere



Features

- ✧ For surface mounted application
- ✧ Glass passivated junction chip
- ✧ Built-in strain relief, ideal for automated placement
- ✧ Plastic material used carries Underwriters Laboratory Classification 94V-O
- ✧ Fast switching for high efficiency
- ✧ High temperature soldering:
250°C/ 10 seconds at terminals

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Terminals: Solder plated
- ✧ Polarity: Indicated by cathode band
- ✧ Packing: 12mm tape per EIA STD RS-481
- ✧ Weight: 0.064 gram

SMA/DO-214AC

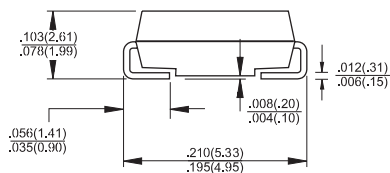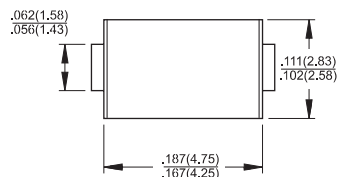

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	RS1A	RS1B	RS1D	RS1G	RS1J	RS1K	RS1M	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current See Fig. 1 @ T _L =90°C	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	1.3							V
Maximum DC Reverse Current @ T _A =25°C	5							uA
at Rated DC Blocking Voltage @ T _A =125°C	50							uA
Maximum Reverse Recovery Time (Note 1)	150		250		500			nS
Typical Junction Capacitance (Note 2)	10							pF
Typical Thermal Resistance (Note 3) RθJA	105.0							°C/W
RθJL	32.0							°C/W
Operating Temperature Range T _J	-55 to +150							°C
Storage Temperature Range T _{STG}	-55 to +150							°C

Notes: 1. Reverse Recovery Test Conditions: IF=0.5A, IR=1.0A, IRR=0.25A

2. Measured at 1 MHz and Applied VR=4.0 Volts

3. Thermal Resistance from Junction to Ambient and from Junction to Lead Mounted on P.C.B. with 0.2"x0.2" (5.0 x 5.0 mm) Copper Pad Areas.

RATINGS AND CHARACTERISTIC CURVES (RS1A THRU RS1M)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

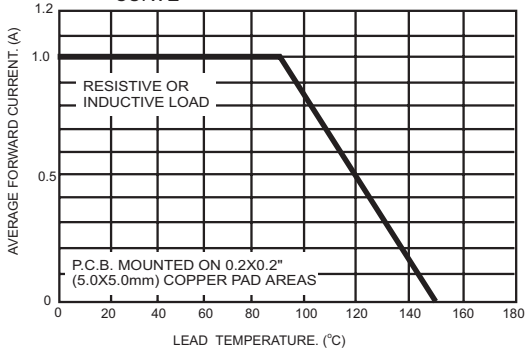


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

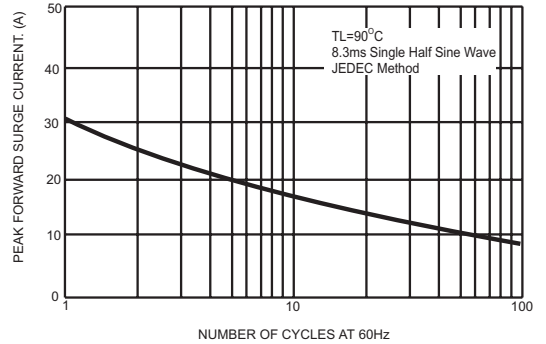


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

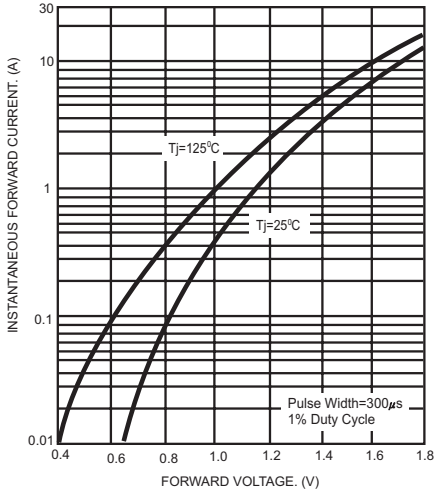


FIG.4- TYPICAL REVERSE CHARACTERISTICS

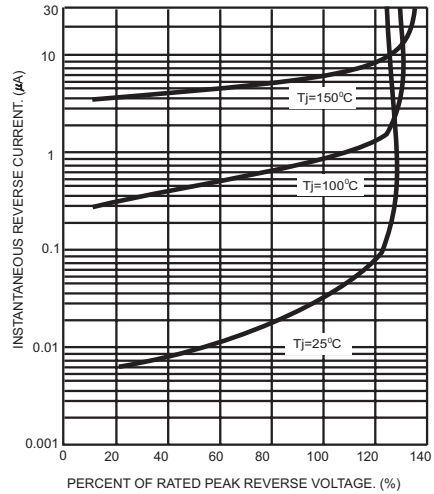


FIG.5- TYPICAL JUNCTION CAPACITANCE

