




MORSETTIERE PER C.S.
TERMINAL BLOCKS FOR P.C.B.
BARRETTES DE CONNEXION POUR C.I.
ANSCHLUßKLEMMEN FÜR LEITERPLATTE

TIPO
 TYPE
 TYPE
 TYP

MRT3

PASSO
 PITCH
 PAS
 RASTERMAß

5 5,08 10 10,16 mm

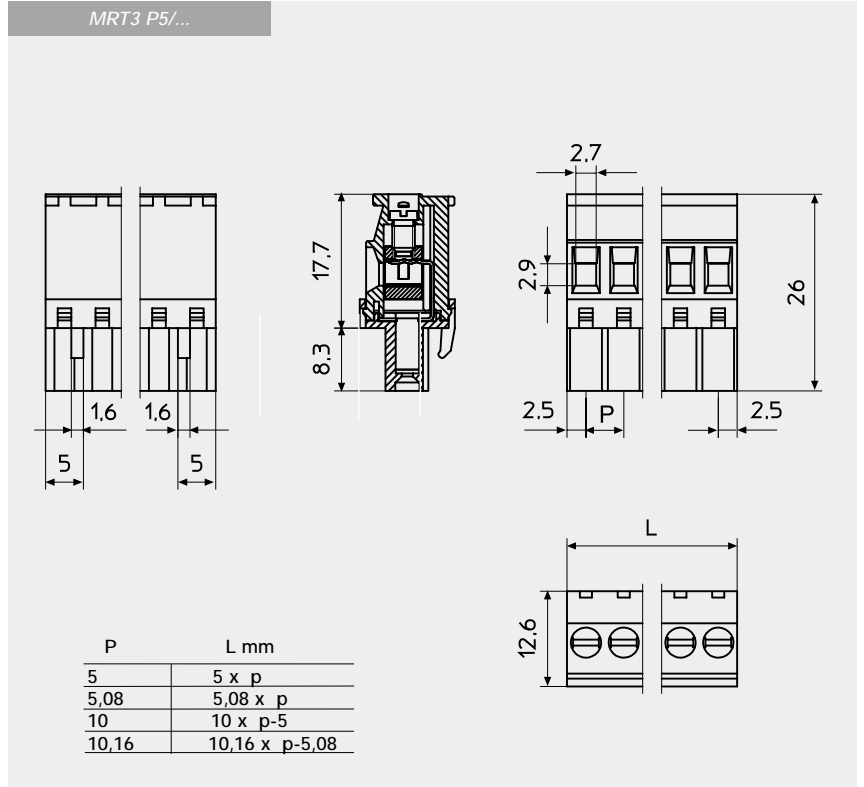


**CONNETTORE FEMMINA
 A MODULI**

**FEMALE CONNECTOR
 MODULES**

**CONNECTEUR FEMELLE
 ELEMENTS**

**BUCHSENLEISTE
 ANREIHBAR**



Corpo isolante Verde	Insulating body Green	Corps isolant Vert	Isolierkörper Grün	PA68 UL94V0
Vite	Screw	Vis	Schraube	M3-C8R+Zn
Morsetto	Clamp	Borne	Klemmkörper	Cu Zn40 Pb2+Ni
Contatto	Pin	Contacte	Kontakt	CuSn7+Sn
Coppia di torsione	Testing torque	Couple de serrage	Zul. Drehmoment	0,5 Nm
Sezione	Section	Section	Querschnitt	2,5 mm ²
Vite imperdibile	Captive screw	Vis imperdable	Schraube unverlierbar	-
Corrente nominale	Nominal current	Courant nominal	Strombelastbarkeit	12 A
Tensione	Voltage	Tension	Betriebsspannung	450/750 V
Temperatura	Temperature	Température	Temperatur	85°C
Grado di protezione	Protection index	Degré de protection	Schutzklasse	IP00
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	≥ 5 MΩ
Rigidità dielettrica	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	≥ 2500 Vac/60"

Ref. EN 60998-1

SCHEMA PER ORDINAZIONE	ORDER SCHEME	TABLEAU DE COMMANDE	BESTELLSCHEMA
	P	p	
	Passo	N° di Poli	Numerazione
	Pitch	Nr. of Poles	Printing
	Pas	Nb. Pôles	Marquage
	Rastermaß	Polzahl	Bedruckung
	5	MIN 2÷MAX 24	
	5,08		
	10	MIN 1÷MAX12	
	10,16		
MRT3	P ... / ...		NU