

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 11/15/06'		

NOTES:

1. MATERIALS

- . Insulator: thermoplastic, UL 94V-0 Rated
- . Contacts: Copper Alloy
- . Shell: Copper Alloy





2. SPECIFICATION

- . Contact resistance: 50mΩ max.
- . Insulation resistance: 100MΩ min.
- . Dielectric withstanding voltage: 100 VAC 1 minute.
- . Temperature range: -40°C to +105°C.

3. PRODUCT NUMBER CODE:

DS1117 - X X X - TME - 002

- Contact plating
0: selective gold flash
- Shell plating
N: Nickel
- Color of housing
B: Black

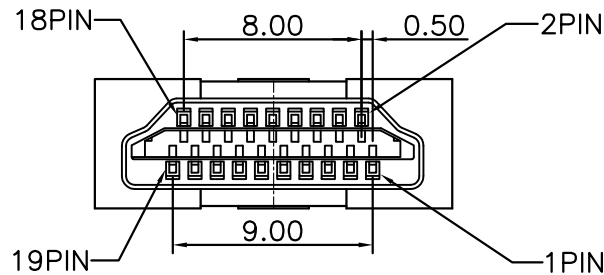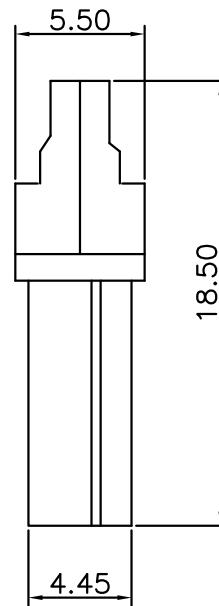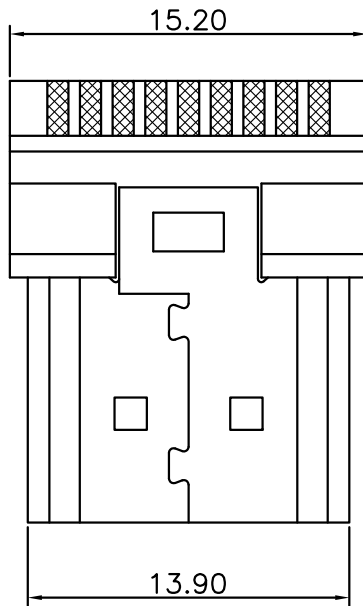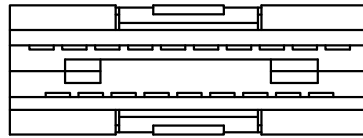

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	HDMI 19PIN MALE Solder type
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1117
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°				
DRAWING TYPE	CUSTOMER			晨翔电子有限公司 CONFLY CONNPLY ELECTRONIC CO. LTD			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1117-XXX-TME-002						